

betesbyggarkiosken

Silicon release agent spray

This spray is free of silicone.

Description

This release spray is ideal for the treatment of surfaces which are porous or light whereby possibility exists that will attach to the silicone. The spray can also be applied to the silicone itself can be made simple so that a two-part mold.

Processing

The best results are obtained by providing the entire surface of a thin / fine spray layer. Give the product a few minutes time to dry before proceeding to the casting of the silicon.

Special_instructions

Make sure that you covered the entire surface and no part spillway. The silicone will possibly adhere to this place and separating require.

Packing

The silicone release spray is a piece comes in an aerosol can with a capacity of 500 ml.

Durability


At least 3 years.

Safety

Set the container to temperatures above 50 degrees. The packaging does not crush, puncture or incinerate after use. Product in a store child safe place.

Characteristics

- Simple spray
- Good release
- Not visible

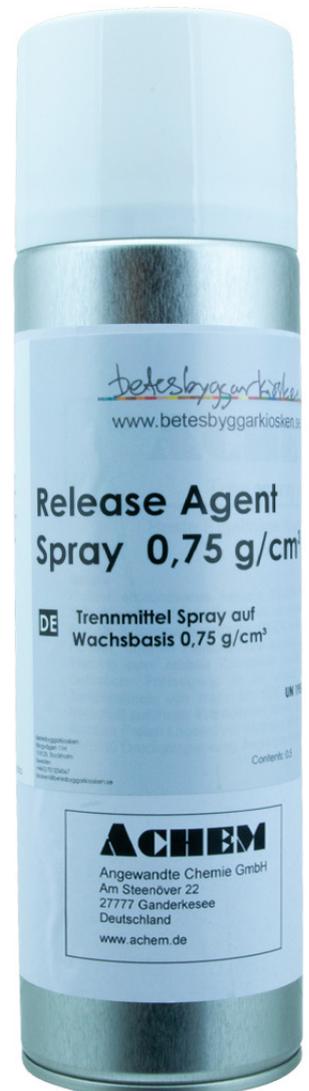

www.betesbyggarkiosken.se